

METAL ROOFING SYSTEMS

FF100 16" X 1" Nail-Strip Standing Seam

Panel Information:




Panel Type:	Standing Seam
Panel Seam:	SnapLock
Panel Width:	16"
Seam Height:	1.0"
Panel Material:	22 GA - 24 GA Min
Panel Surface:	Smooth / Embossed Optional
Panel Clip:	None
Minimum Slope:	3/12
Substrate:	Plywood

Panel Testing:

Uplift Resistance:	UL 90
Hail Rating:	Class 4 Impact UL 2218
Fire Rating:	UL Class A
Texas Department of Insurance Approval:	RC-560

Panel Notes:

- With this 24 GA, 16" wide panel, you may opt to use heavier gauge coil and narrower width panels. Fastener spacing will not change.
- This panel uses a 20" coil. Maximum width coil of 24".
- This panel uses 4-1/16" of material to form the panel.
- If you take the square footage of the roof and multiply that by 1.25, the total will be the amount coil needed to manufacture the panels.
- This panel is NOT approved for Weathertight Warranties.

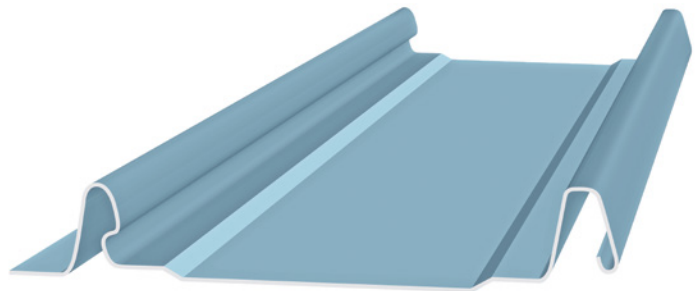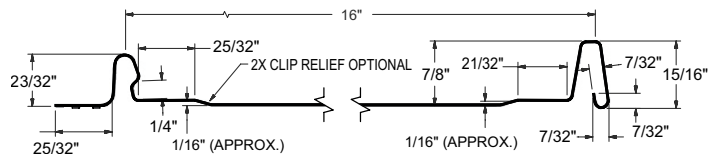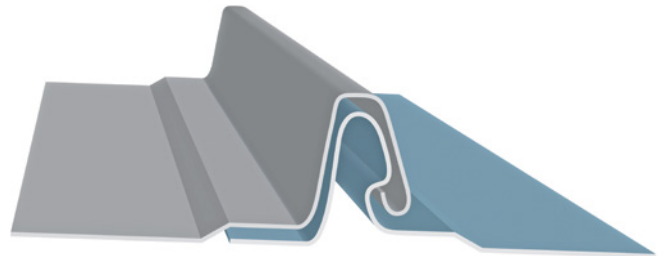

AllSouth Pre-Engineered Components LLC (APEC)
985 Technology Drive Dothan, AL 36303
PH 334-699-8394 FX 334-699-8395
www.buildwithapec.com